




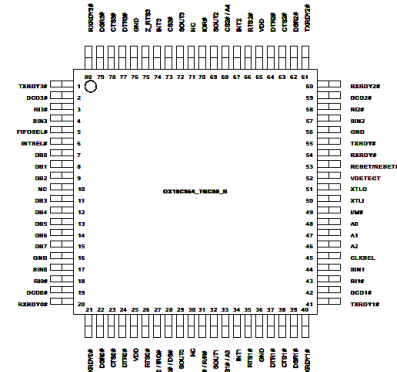








2. Connectors and Jumper Settings

2.1 JP6 COM6 transfer type select		2.2 JP5 COM5 transfer type select		2.3 JP7 COM7 transfer type select																									
	<table border="1"> <thead> <tr> <th>Transfer type</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td>3 - 4</td> </tr> <tr> <td>RS-422</td> <td>1 - 2, 5 - 6</td> </tr> <tr> <td>RS-485</td> <td>1 - 2</td> </tr> </tbody> </table>	Transfer type	Select	RS-232	3 - 4	RS-422	1 - 2, 5 - 6	RS-485	1 - 2		<table border="1"> <thead> <tr> <th>Transfer type</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td>3 - 4</td> </tr> <tr> <td>RS-422</td> <td>1 - 2, 5 - 6</td> </tr> <tr> <td>RS-485</td> <td>1 - 2</td> </tr> </tbody> </table>	Transfer type	Select	RS-232	3 - 4	RS-422	1 - 2, 5 - 6	RS-485	1 - 2		<table border="1"> <thead> <tr> <th>Transfer type</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td>3 - 4</td> </tr> <tr> <td>RS-422</td> <td>1 - 2, 5 - 6</td> </tr> <tr> <td>RS-485</td> <td>1 - 2</td> </tr> </tbody> </table>	Transfer type	Select	RS-232	3 - 4	RS-422	1 - 2, 5 - 6	RS-485	1 - 2
	Transfer type	Select																											
RS-232	3 - 4																												
RS-422	1 - 2, 5 - 6																												
RS-485	1 - 2																												
Transfer type	Select																												
RS-232	3 - 4																												
RS-422	1 - 2, 5 - 6																												
RS-485	1 - 2																												
Transfer type	Select																												
RS-232	3 - 4																												
RS-422	1 - 2, 5 - 6																												
RS-485	1 - 2																												
2.4 JP10 COM5 ~ COM8 termination enable		2.5 JP8 COM8 transfer type select		2.6 UART Controller 1 OX16C954 UART Controller for COM5~COM8																									
	<table border="1"> <thead> <tr> <th>120R termination enable</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>COM5 120R termination enable</td> <td>1 - 2</td> </tr> <tr> <td>COM6 120R termination enable</td> <td>3 - 4</td> </tr> <tr> <td>COM7 120R termination enable</td> <td>5 - 6</td> </tr> <tr> <td>COM8 120R termination enable</td> <td>7 - 8</td> </tr> </tbody> </table>	120R termination enable	Select	COM5 120R termination enable	1 - 2	COM6 120R termination enable	3 - 4	COM7 120R termination enable	5 - 6	COM8 120R termination enable	7 - 8		<table border="1"> <thead> <tr> <th>Transfer type</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td>3 - 4</td> </tr> <tr> <td>RS-422</td> <td>1 - 2, 5 - 6</td> </tr> <tr> <td>RS-485</td> <td>1 - 2</td> </tr> </tbody> </table>	Transfer type	Select	RS-232	3 - 4	RS-422	1 - 2, 5 - 6	RS-485	1 - 2								
	120R termination enable	Select																											
	COM5 120R termination enable	1 - 2																											
	COM6 120R termination enable	3 - 4																											
	COM7 120R termination enable	5 - 6																											
COM8 120R termination enable	7 - 8																												
Transfer type	Select																												
RS-232	3 - 4																												
RS-422	1 - 2, 5 - 6																												
RS-485	1 - 2																												

2.7 COM 5~8 COM5 ~ COM8 output port	2.8 JP11 PCI INT and IDSEL signal select	2.9 JP3 COM3 transfer type select
---	--	---

	<table border="1" style="width:100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Pin</th> <th>RS-232</th> <th>RS-422</th> <th>RS-485</th> </tr> </thead> <tbody> <tr><td>1</td><td>DCD_8</td><td>N/C</td><td>N/C</td></tr> <tr><td>2</td><td>DSR_8</td><td>Rx-_8</td><td>N/C</td></tr> <tr><td>3</td><td>RXD_8</td><td>Rx+_8</td><td>N/C</td></tr> <tr><td>4</td><td>RTS_8</td><td>N/C</td><td>N/C</td></tr> <tr><td>5</td><td>TXD_8</td><td>N/C</td><td>N/C</td></tr> <tr><td>6</td><td>CTS_8</td><td>Tx-_8</td><td>Data-_8</td></tr> <tr><td>7</td><td>DTR_8</td><td>N/C</td><td>N/C</td></tr> <tr><td>8</td><td>RI_8</td><td>Tx+_8</td><td>Data+_8</td></tr> <tr><td>9</td><td>GND</td><td>GND</td><td>GND</td></tr> <tr><td>10</td><td>+5V</td><td>+5V</td><td>+5V</td></tr> <tr><td>11</td><td>DCD_7</td><td>N/C</td><td>N/C</td></tr> <tr><td>12</td><td>DSR_7</td><td>Rx-_7</td><td>N/C</td></tr> <tr><td>13</td><td>RXD_7</td><td>Rx+_7</td><td>N/C</td></tr> <tr><td>14</td><td>RTS_7</td><td>N/C</td><td>N/C</td></tr> <tr><td>15</td><td>TXD_7</td><td>N/C</td><td>N/C</td></tr> <tr><td>16</td><td>CTS_7</td><td>Tx-_7</td><td>Data-_7</td></tr> <tr><td>17</td><td>DTR_7</td><td>N/C</td><td>N/C</td></tr> <tr><td>18</td><td>RI_7</td><td>Tx+_7</td><td>Data+_7</td></tr> <tr><td>19</td><td>GND</td><td>GND</td><td>GND</td></tr> <tr><td>20</td><td>+5V</td><td>+5V</td><td>+5V</td></tr> <tr><td>21</td><td>DCD_6</td><td>N/C</td><td>N/C</td></tr> <tr><td>22</td><td>DSR_6</td><td>Rx-_6</td><td>N/C</td></tr> <tr><td>23</td><td>RXD_6</td><td>Rx+_6</td><td>N/C</td></tr> <tr><td>24</td><td>RTS_6</td><td>N/C</td><td>N/C</td></tr> <tr><td>25</td><td>TXD_6</td><td>N/C</td><td>N/C</td></tr> <tr><td>26</td><td>CTS_6</td><td>Tx-_6</td><td>Data-_6</td></tr> <tr><td>27</td><td>DTR_6</td><td>N/C</td><td>N/C</td></tr> <tr><td>28</td><td>RI_6</td><td>Tx+_6</td><td>Data+_6</td></tr> <tr><td>29</td><td>GND</td><td>GND</td><td>GND</td></tr> <tr><td>30</td><td>+5V</td><td>+5V</td><td>+5V</td></tr> <tr><td>31</td><td>N/C</td><td>N/C</td><td>N/C</td></tr> <tr><td>32</td><td>N/C</td><td>N/C</td><td>N/C</td></tr> <tr><td>33</td><td>DCD_5</td><td>N/C</td><td>N/C</td></tr> <tr><td>34</td><td>DSR_5</td><td>Rx-_5</td><td>N/C</td></tr> <tr><td>35</td><td>RXD_5</td><td>Rx+_5</td><td></td></tr> <tr><td>36</td><td>RTS_5</td><td>N/C</td><td>N/C</td></tr> <tr><td>37</td><td>TXD_5</td><td>N/C</td><td>N/C</td></tr> <tr><td>38</td><td>CTS_5</td><td>Tx-_5</td><td>Data-_5</td></tr> <tr><td>39</td><td>DTR_5</td><td>N/C</td><td>N/C</td></tr> <tr><td>40</td><td>RI_5</td><td>Tx+_5</td><td>Data+_5</td></tr> <tr><td>41</td><td>GND</td><td>GND</td><td>GND</td></tr> <tr><td>42</td><td>+5V</td><td>+5V</td><td>+5V</td></tr> <tr><td>43</td><td>N/C</td><td>N/C</td><td>N/C</td></tr> <tr><td>44</td><td>N/C</td><td>N/C</td><td>N/C</td></tr> </tbody> </table>	Pin	RS-232	RS-422	RS-485	1	DCD_8	N/C	N/C	2	DSR_8	Rx-_8	N/C	3	RXD_8	Rx+_8	N/C	4	RTS_8	N/C	N/C	5	TXD_8	N/C	N/C	6	CTS_8	Tx-_8	Data-_8	7	DTR_8	N/C	N/C	8	RI_8	Tx+_8	Data+_8	9	GND	GND	GND	10	+5V	+5V	+5V	11	DCD_7	N/C	N/C	12	DSR_7	Rx-_7	N/C	13	RXD_7	Rx+_7	N/C	14	RTS_7	N/C	N/C	15	TXD_7	N/C	N/C	16	CTS_7	Tx-_7	Data-_7	17	DTR_7	N/C	N/C	18	RI_7	Tx+_7	Data+_7	19	GND	GND	GND	20	+5V	+5V	+5V	21	DCD_6	N/C	N/C	22	DSR_6	Rx-_6	N/C	23	RXD_6	Rx+_6	N/C	24	RTS_6	N/C	N/C	25	TXD_6	N/C	N/C	26	CTS_6	Tx-_6	Data-_6	27	DTR_6	N/C	N/C	28	RI_6	Tx+_6	Data+_6	29	GND	GND	GND	30	+5V	+5V	+5V	31	N/C	N/C	N/C	32	N/C	N/C	N/C	33	DCD_5	N/C	N/C	34	DSR_5	Rx-_5	N/C	35	RXD_5	Rx+_5		36	RTS_5	N/C	N/C	37	TXD_5	N/C	N/C	38	CTS_5	Tx-_5	Data-_5	39	DTR_5	N/C	N/C	40	RI_5	Tx+_5	Data+_5	41	GND	GND	GND	42	+5V	+5V	+5V	43	N/C	N/C	N/C	44	N/C	N/C	N/C	 <table border="1" style="width:100%; border-collapse: collapse; text-align: center; margin-top: 20px;"> <thead> <tr> <th>PCI INT and IDSEL signal select</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>CLK0, IDSEL 0</td> <td>1-2, 3-4</td> </tr> <tr> <td>CLK1, IDSEL 1</td> <td>1 - 2</td> </tr> <tr> <td>CLK2, IDSEL 2</td> <td>3 - 4</td> </tr> <tr> <td>CLK2, IDSEL 3</td> <td>N/A</td> </tr> </tbody> </table>	PCI INT and IDSEL signal select	Select	CLK0, IDSEL 0	1-2, 3-4	CLK1, IDSEL 1	1 - 2	CLK2, IDSEL 2	3 - 4	CLK2, IDSEL 3	N/A	 <table border="1" style="width:100%; border-collapse: collapse; text-align: center; margin-top: 20px;"> <thead> <tr> <th>Transfer type</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td>3 - 4</td> </tr> <tr> <td>RS-422</td> <td>1 - 2, 5 - 6</td> </tr> <tr> <td>RS-485</td> <td>1 - 2</td> </tr> </tbody> </table>	Transfer type	Select	RS-232	3 - 4	RS-422	1 - 2, 5 - 6	RS-485	1 - 2
Pin	RS-232	RS-422	RS-485																																																																																																																																																																																																						
1	DCD_8	N/C	N/C																																																																																																																																																																																																						
2	DSR_8	Rx-_8	N/C																																																																																																																																																																																																						
3	RXD_8	Rx+_8	N/C																																																																																																																																																																																																						
4	RTS_8	N/C	N/C																																																																																																																																																																																																						
5	TXD_8	N/C	N/C																																																																																																																																																																																																						
6	CTS_8	Tx-_8	Data-_8																																																																																																																																																																																																						
7	DTR_8	N/C	N/C																																																																																																																																																																																																						
8	RI_8	Tx+_8	Data+_8																																																																																																																																																																																																						
9	GND	GND	GND																																																																																																																																																																																																						
10	+5V	+5V	+5V																																																																																																																																																																																																						
11	DCD_7	N/C	N/C																																																																																																																																																																																																						
12	DSR_7	Rx-_7	N/C																																																																																																																																																																																																						
13	RXD_7	Rx+_7	N/C																																																																																																																																																																																																						
14	RTS_7	N/C	N/C																																																																																																																																																																																																						
15	TXD_7	N/C	N/C																																																																																																																																																																																																						
16	CTS_7	Tx-_7	Data-_7																																																																																																																																																																																																						
17	DTR_7	N/C	N/C																																																																																																																																																																																																						
18	RI_7	Tx+_7	Data+_7																																																																																																																																																																																																						
19	GND	GND	GND																																																																																																																																																																																																						
20	+5V	+5V	+5V																																																																																																																																																																																																						
21	DCD_6	N/C	N/C																																																																																																																																																																																																						
22	DSR_6	Rx-_6	N/C																																																																																																																																																																																																						
23	RXD_6	Rx+_6	N/C																																																																																																																																																																																																						
24	RTS_6	N/C	N/C																																																																																																																																																																																																						
25	TXD_6	N/C	N/C																																																																																																																																																																																																						
26	CTS_6	Tx-_6	Data-_6																																																																																																																																																																																																						
27	DTR_6	N/C	N/C																																																																																																																																																																																																						
28	RI_6	Tx+_6	Data+_6																																																																																																																																																																																																						
29	GND	GND	GND																																																																																																																																																																																																						
30	+5V	+5V	+5V																																																																																																																																																																																																						
31	N/C	N/C	N/C																																																																																																																																																																																																						
32	N/C	N/C	N/C																																																																																																																																																																																																						
33	DCD_5	N/C	N/C																																																																																																																																																																																																						
34	DSR_5	Rx-_5	N/C																																																																																																																																																																																																						
35	RXD_5	Rx+_5																																																																																																																																																																																																							
36	RTS_5	N/C	N/C																																																																																																																																																																																																						
37	TXD_5	N/C	N/C																																																																																																																																																																																																						
38	CTS_5	Tx-_5	Data-_5																																																																																																																																																																																																						
39	DTR_5	N/C	N/C																																																																																																																																																																																																						
40	RI_5	Tx+_5	Data+_5																																																																																																																																																																																																						
41	GND	GND	GND																																																																																																																																																																																																						
42	+5V	+5V	+5V																																																																																																																																																																																																						
43	N/C	N/C	N/C																																																																																																																																																																																																						
44	N/C	N/C	N/C																																																																																																																																																																																																						
PCI INT and IDSEL signal select	Select																																																																																																																																																																																																								
CLK0, IDSEL 0	1-2, 3-4																																																																																																																																																																																																								
CLK1, IDSEL 1	1 - 2																																																																																																																																																																																																								
CLK2, IDSEL 2	3 - 4																																																																																																																																																																																																								
CLK2, IDSEL 3	N/A																																																																																																																																																																																																								
Transfer type	Select																																																																																																																																																																																																								
RS-232	3 - 4																																																																																																																																																																																																								
RS-422	1 - 2, 5 - 6																																																																																																																																																																																																								
RS-485	1 - 2																																																																																																																																																																																																								

2.10 JP4 COM4 transfer type select		2.11 JP2 COM2 transfer type select		2.12 JP9 COM1 ~ COM4 termination enable																											
	<table border="1"> <thead> <tr> <th>Transfer type</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td>3 - 4</td> </tr> <tr> <td>RS-422</td> <td>1 - 2, 5 - 6</td> </tr> <tr> <td>RS-485</td> <td>1 - 2</td> </tr> </tbody> </table>	Transfer type	Select	RS-232	3 - 4	RS-422	1 - 2, 5 - 6	RS-485	1 - 2		<table border="1"> <thead> <tr> <th>Transfer type</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>RS-232</td> <td>3 - 4</td> </tr> <tr> <td>RS-422</td> <td>1 - 2, 5 - 6</td> </tr> <tr> <td>RS-485</td> <td>1 - 2</td> </tr> </tbody> </table>	Transfer type	Select	RS-232	3 - 4	RS-422	1 - 2, 5 - 6	RS-485	1 - 2		<table border="1"> <thead> <tr> <th>120R Termination enable</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>COM1 120R termination enable</td> <td>1 - 2</td> </tr> <tr> <td>COM2 120R termination enable</td> <td>3 - 4</td> </tr> <tr> <td>COM3 120R termination enable</td> <td>5 - 6</td> </tr> <tr> <td>COM4 120R termination enable</td> <td>7 - 8</td> </tr> </tbody> </table>	120R Termination enable	Select	COM1 120R termination enable	1 - 2	COM2 120R termination enable	3 - 4	COM3 120R termination enable	5 - 6	COM4 120R termination enable	7 - 8
Transfer type	Select																														
RS-232	3 - 4																														
RS-422	1 - 2, 5 - 6																														
RS-485	1 - 2																														
Transfer type	Select																														
RS-232	3 - 4																														
RS-422	1 - 2, 5 - 6																														
RS-485	1 - 2																														
120R Termination enable	Select																														
COM1 120R termination enable	1 - 2																														
COM2 120R termination enable	3 - 4																														
COM3 120R termination enable	5 - 6																														
COM4 120R termination enable	7 - 8																														

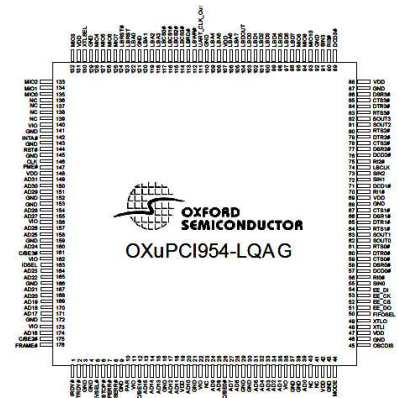
2.13 JP1 COM1 transfer type select	2.14 COM 1~4 COM1~ COM4 output port	2.15 UART Controller 2 OXuPCI954 UART Controller for COM1~COM4
--	---	---





Transfer type	Select
RS-232	3 - 4
RS-422	1 - 2, 5 - 6
RS-485	1 - 2



Pin	RS-232	RS-422	RS-485
1	DCD_4	N/C	N/C
2	DSR_4	Rx_4	Data-_4
3	RXD_4	Rx+_4	Data+_4
4	RTS_4	N/C	N/C
5	TXD_4	N/C	N/C
6	CTS_4	Tx-_4	N/C
7	DTR_4	N/C	N/C
8	RI_4	Tx+_4	N/C
9	GND	GND	GND
10	+5V	+5V	+5V
11	DCD_3	N/C	N/C
12	DSR_3	Rx_3	Data-_3
13	RXD_3	Rx+_3	Data+_3
14	RTS_3	N/C	N/C
15	TXD_3	N/C	N/C
16	CTS_3	Tx-_3	N/C
17	DTR_3	N/C	N/C
18	RI_3	Tx+_3	N/C
19	GND	GND	GND
20	+5V	+5V	+5V
21	DCD_2	N/C	N/C
22	DSR_2	Rx_2	Data-_2
23	RXD_2	Rx+_2	Data+_2
24	RTS_2	N/C	N/C
25	TXD_2	N/C	N/C
26	CTS_2	Tx-_2	N/C
27	DTR_2	N/C	N/C
28	RI_2	Tx+_2	N/C
29	GND	GND	GND
30	+5V	+5V	+5V
31	N/C	N/C	N/C
32	N/C	N/C	N/C
33	DCD_1	N/C	N/C
34	DSR_1	Rx_1	Data-_1
35	RXD_1	Rx+_1	Data+_1
36	RTS_1	N/C	N/C
37	TXD_1	N/C	N/C
38	CTS_1	Tx-_1	N/C
39	DTR_1	N/C	N/C
40	RI_1	Tx+_1	N/C
41	GND	GND	GND
42	+5V	+5V	+5V
43	N/C	N/C	N/C
44	N/C	N/C	N/C



2.16 JP12 PCI INT signal select		2.17 CN1 PCI 104 slot signal from M/B											
	<table border="1"> <thead> <tr> <th>PCI INT signal select</th> <th>Select</th> </tr> </thead> <tbody> <tr> <td>INTA</td> <td>1 - 2</td> </tr> <tr> <td>INTB</td> <td>3 - 4</td> </tr> <tr> <td>INTC</td> <td>5 - 6</td> </tr> <tr> <td>INTD</td> <td>7 - 8</td> </tr> </tbody> </table>	PCI INT signal select	Select	INTA	1 - 2	INTB	3 - 4	INTC	5 - 6	INTD	7 - 8		
PCI INT signal select	Select												
INTA	1 - 2												
INTB	3 - 4												
INTC	5 - 6												
INTD	7 - 8												