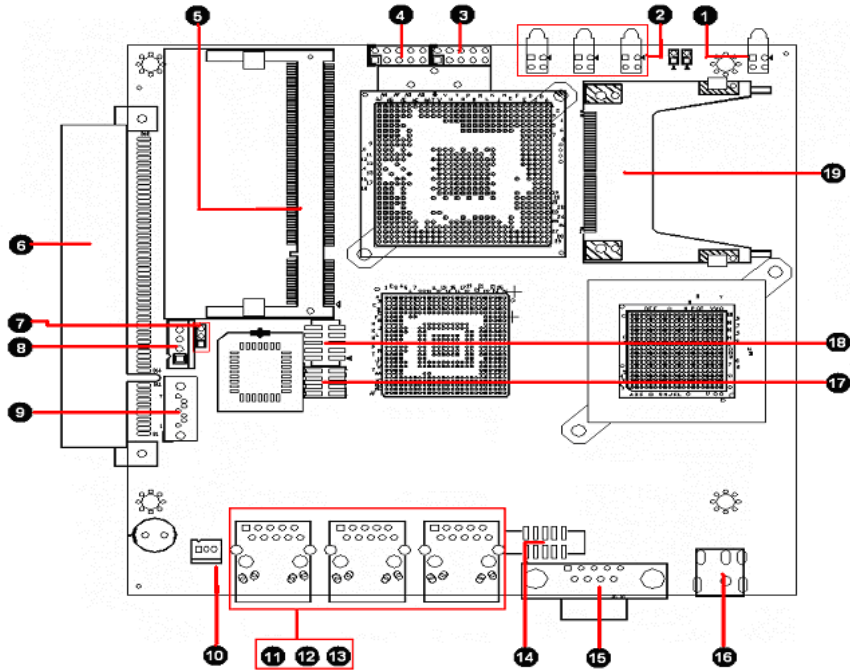


# AR-B8601 Quick Manual

## 1. Mainboard illustration (Top Side)











## 2. Pin definition & Jumper setting (Top Side)

1 POWER,HDD LED	11 Ethernet RJ-45
2 LAN LED	12 Ethernet RJ-45
3 USB Connector1	13 Ethernet RJ-45
4 USB Connector2	14 VGA Connector
5 DDR2 Memory Slot	15 Serial Port
6 PCI Slot (3.3 Volt) (OPTION)	16 Power Jack (12V Input)
7 JP1: CMOS Jumper	17 Panel Connector
8 SATA Power Connector	18 GPIO Connector
9 SATA Connector	19 Compact Flash Connector
10 FAN Connector	

## 2.1 Connectors and Jumper settings

2.1.1 POWER HDD LED		2.1.2 LAN LED		2.1.3 USB Connector1																																					
	<table border="1"> <thead> <tr> <th>LDE1</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>UP</td> <td>POWER</td> </tr> <tr> <td>DOWN</td> <td>HDD</td> </tr> </tbody> </table>	LDE1	Description	UP	POWER	DOWN	HDD		<table border="1"> <thead> <tr> <th>LED</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>UP</td> <td>LINK</td> </tr> <tr> <td>DOWN</td> <td>ACTS</td> </tr> </tbody> </table>	LED	Description	UP	LINK	DOWN	ACTS		<table border="1"> <thead> <tr> <th>PIN</th> <th>SIGNAL</th> <th>PIN</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+5V</td> <td>2</td> <td>+5V</td> </tr> <tr> <td>3</td> <td>USB2-</td> <td>4</td> <td>USB3-</td> </tr> <tr> <td>5</td> <td>USB2+</td> <td>6</td> <td>USB3+</td> </tr> <tr> <td>7</td> <td>GND</td> <td>8</td> <td>GND</td> </tr> <tr> <td>9</td> <td>GND</td> <td>10</td> <td>GND</td> </tr> </tbody> </table>	PIN	SIGNAL	PIN	SIGNAL	1	+5V	2	+5V	3	USB2-	4	USB3-	5	USB2+	6	USB3+	7	GND	8	GND	9	GND	10	GND
	LDE1	Description																																							
UP	POWER																																								
DOWN	HDD																																								
LED	Description																																								
UP	LINK																																								
DOWN	ACTS																																								
PIN	SIGNAL	PIN	SIGNAL																																						
1	+5V	2	+5V																																						
3	USB2-	4	USB3-																																						
5	USB2+	6	USB3+																																						
7	GND	8	GND																																						
9	GND	10	GND																																						
2.1.4 USB Connector2		2.1.5 DDR2 Memory Slot		2.1.6 PCI Slot (3.3 Volt)																																					
	<table border="1"> <thead> <tr> <th>PIN</th> <th>SIGNAL</th> <th>PIN</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+5V</td> <td>2</td> <td>+5V</td> </tr> <tr> <td>3</td> <td>USB0-</td> <td>4</td> <td>USB1-</td> </tr> <tr> <td>5</td> <td>USB0+</td> <td>6</td> <td>USB1+</td> </tr> <tr> <td>7</td> <td>GND</td> <td>8</td> <td>GND</td> </tr> <tr> <td>9</td> <td>GND</td> <td>10</td> <td>GND</td> </tr> </tbody> </table>	PIN	SIGNAL	PIN	SIGNAL	1	+5V	2	+5V	3	USB0-	4	USB1-	5	USB0+	6	USB1+	7	GND	8	GND	9	GND	10	GND	<p>SODIMM Memory Slot</p>	<p>PCI Slot (3.3 Volt) (OPTION)</p>														
	PIN	SIGNAL	PIN	SIGNAL																																					
1	+5V	2	+5V																																						
3	USB0-	4	USB1-																																						
5	USB0+	6	USB1+																																						
7	GND	8	GND																																						
9	GND	10	GND																																						
2.1.7 JP1: CMOS Jumper		2.1.8 SATA Power Connector		2.1.9 SATA Connector																																					
	<table border="1"> <thead> <tr> <th>JP1</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1-2</td> <td>NORMAL (default)</td> </tr> <tr> <td>2-3</td> <td>RESET COMS</td> </tr> </tbody> </table>	JP1	Description	1-2	NORMAL (default)	2-3	RESET COMS		<table border="1"> <thead> <tr> <th>SET</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+12V</td> </tr> <tr> <td>2</td> <td>GND</td> </tr> <tr> <td>3</td> <td>+3.3V</td> </tr> <tr> <td>4</td> <td>+5V</td> </tr> </tbody> </table>	SET	SIGNAL	1	+12V	2	GND	3	+3.3V	4	+5V		<table border="1"> <thead> <tr> <th>PIN</th> <th>SIGNAL</th> <th>PIN</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>GND</td> <td>2</td> <td>TX+</td> </tr> <tr> <td>3</td> <td>TX-</td> <td>4</td> <td>GND</td> </tr> <tr> <td>5</td> <td>RX+</td> <td>6</td> <td>RX-</td> </tr> <tr> <td>7</td> <td>GND</td> <td></td> <td></td> </tr> </tbody> </table>	PIN	SIGNAL	PIN	SIGNAL	1	GND	2	TX+	3	TX-	4	GND	5	RX+	6	RX-	7	GND		
	JP1	Description																																							
	1-2	NORMAL (default)																																							
2-3	RESET COMS																																								
SET	SIGNAL																																								
1	+12V																																								
2	GND																																								
3	+3.3V																																								
4	+5V																																								
PIN	SIGNAL	PIN	SIGNAL																																						
1	GND	2	TX+																																						
3	TX-	4	GND																																						
5	RX+	6	RX-																																						
7	GND																																								

2.1.10 FAN Connector		2.1.11/2.1.12/2.1.13 Ethernet RJ-45 (LAN1/LAN2/LAN3)		2.1.14 VGA Connector																																																			
	<table border="1"> <thead> <tr> <th>PIN</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>GND</td> </tr> <tr> <td>2</td> <td>FAN VCC</td> </tr> <tr> <td>3</td> <td>SENSE</td> </tr> </tbody> </table>	PIN	Description	1	GND	2	FAN VCC	3	SENSE		<table border="1"> <thead> <tr> <th>PIN</th> <th>SIGNAL</th> <th>PIN</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>TX+</td> <td>5</td> <td>N/C</td> </tr> <tr> <td>2</td> <td>TX-</td> <td>6</td> <td>RX-</td> </tr> <tr> <td>3</td> <td>RX+</td> <td>7</td> <td>N/C</td> </tr> <tr> <td>4</td> <td>N/C</td> <td>8</td> <td>N/C</td> </tr> </tbody> </table>	PIN	SIGNAL	PIN	SIGNAL	1	TX+	5	N/C	2	TX-	6	RX-	3	RX+	7	N/C	4	N/C	8	N/C		<table border="1"> <thead> <tr> <th>PIN</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>RED (R)</td> </tr> <tr> <td>2</td> <td>Ground</td> </tr> <tr> <td>3</td> <td>GREEN (G)</td> </tr> <tr> <td>4</td> <td>Ground</td> </tr> <tr> <td>5</td> <td>BLUE (B)</td> </tr> <tr> <td>6</td> <td>Ground</td> </tr> <tr> <td>7</td> <td>VERTICAL SYNCHRON (VS)</td> </tr> <tr> <td>8</td> <td>CLOCK (CLK)</td> </tr> <tr> <td>9</td> <td>HORIZONTAL SYNCHRON (HS)</td> </tr> <tr> <td>10</td> <td>DATA (SDATA)</td> </tr> </tbody> </table>	PIN	Description	1	RED (R)	2	Ground	3	GREEN (G)	4	Ground	5	BLUE (B)	6	Ground	7	VERTICAL SYNCHRON (VS)	8	CLOCK (CLK)	9	HORIZONTAL SYNCHRON (HS)	10	DATA (SDATA)
PIN	Description																																																						
1	GND																																																						
2	FAN VCC																																																						
3	SENSE																																																						
PIN	SIGNAL	PIN	SIGNAL																																																				
1	TX+	5	N/C																																																				
2	TX-	6	RX-																																																				
3	RX+	7	N/C																																																				
4	N/C	8	N/C																																																				
PIN	Description																																																						
1	RED (R)																																																						
2	Ground																																																						
3	GREEN (G)																																																						
4	Ground																																																						
5	BLUE (B)																																																						
6	Ground																																																						
7	VERTICAL SYNCHRON (VS)																																																						
8	CLOCK (CLK)																																																						
9	HORIZONTAL SYNCHRON (HS)																																																						
10	DATA (SDATA)																																																						
2.1.15 Serial Port		2.1.16 Power Jack (12V Input)		2.1.17 Panel Connector																																																			
	<table border="1"> <thead> <tr> <th>PIN</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>DATA CARRIER DETECT (DCD)</td> </tr> <tr> <td>2</td> <td>RECEIVE DATA (RXD)</td> </tr> <tr> <td>3</td> <td>TRANSMIT DATA (TXD)</td> </tr> <tr> <td>4</td> <td>DATA TERMINAL READY (DTR)</td> </tr> <tr> <td>5</td> <td>GROUND</td> </tr> <tr> <td>6</td> <td>DATA SET READY (DSR)</td> </tr> <tr> <td>7</td> <td>REQUEST TO SEND (RTS)</td> </tr> <tr> <td>8</td> <td>CLEAR TO SEND (CTS)</td> </tr> <tr> <td>9</td> <td>RING INDICATOR (RI)</td> </tr> </tbody> </table>	PIN	Description	1	DATA CARRIER DETECT (DCD)	2	RECEIVE DATA (RXD)	3	TRANSMIT DATA (TXD)	4	DATA TERMINAL READY (DTR)	5	GROUND	6	DATA SET READY (DSR)	7	REQUEST TO SEND (RTS)	8	CLEAR TO SEND (CTS)	9	RING INDICATOR (RI)		<p>Power Jack (12V Input)</p>		<table border="1"> <thead> <tr> <th>SET</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>1-2</td> <td>POWER LED</td> </tr> <tr> <td>3-4</td> <td>RSET</td> </tr> <tr> <td>5-6</td> <td>POWER BUTTOM</td> </tr> <tr> <td>7-8</td> <td>CLOSE: AT MODE</td> </tr> </tbody> </table>	SET	SIGNAL	1-2	POWER LED	3-4	RSET	5-6	POWER BUTTOM	7-8	CLOSE: AT MODE																				
PIN	Description																																																						
1	DATA CARRIER DETECT (DCD)																																																						
2	RECEIVE DATA (RXD)																																																						
3	TRANSMIT DATA (TXD)																																																						
4	DATA TERMINAL READY (DTR)																																																						
5	GROUND																																																						
6	DATA SET READY (DSR)																																																						
7	REQUEST TO SEND (RTS)																																																						
8	CLEAR TO SEND (CTS)																																																						
9	RING INDICATOR (RI)																																																						
SET	SIGNAL																																																						
1-2	POWER LED																																																						
3-4	RSET																																																						
5-6	POWER BUTTOM																																																						
7-8	CLOSE: AT MODE																																																						
2.1.18 GPIO Connector		2.1.19 Compact Flash Connector																																																					
	<table border="1"> <thead> <tr> <th>PIN</th> <th>SIGNAL</th> <th>PIN</th> <th>SIGNAL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>VCC</td> <td>2</td> <td>GND</td> </tr> <tr> <td>3</td> <td>GPIO0</td> <td>4</td> <td>GPIO4</td> </tr> <tr> <td>5</td> <td>GPIO1</td> <td>6</td> <td>GPIO5</td> </tr> <tr> <td>7</td> <td>GPIO2</td> <td>8</td> <td>GPIO6</td> </tr> <tr> <td>9</td> <td>GPIO3</td> <td>10</td> <td>GPIO7</td> </tr> </tbody> </table>	PIN	SIGNAL	PIN	SIGNAL	1	VCC	2	GND	3	GPIO0	4	GPIO4	5	GPIO1	6	GPIO5	7	GPIO2	8	GPIO6	9	GPIO3	10	GPIO7		<p>Compact Flash Connector</p>																												
PIN	SIGNAL	PIN	SIGNAL																																																				
1	VCC	2	GND																																																				
3	GPIO0	4	GPIO4																																																				
5	GPIO1	6	GPIO5																																																				
7	GPIO2	8	GPIO6																																																				
9	GPIO3	10	GPIO7																																																				