


ANR-W480A1/A2

1U Rackmount Network server Intel® 10th Gen Comet Lake-S Xeon W, Core™ i9, i7, i5, i3, 2 Exp. NIMs & 1+1 Redundant PSU



Features

- 4 x UDIMM DDR4
- 2 x Exp. NIM (1G/10G/40G, Fiber/Copper/LAN Bypass)
- 2 x Console port (RJ45, Micro USB)
- 2 x 1G Fiber
- 9 x GbE Copper with 2-pairs LAN Bypass
- 2 x 2.5" SATA-III
- 1 x M.2
- Optional 1+1 Redundant PSU (300W)

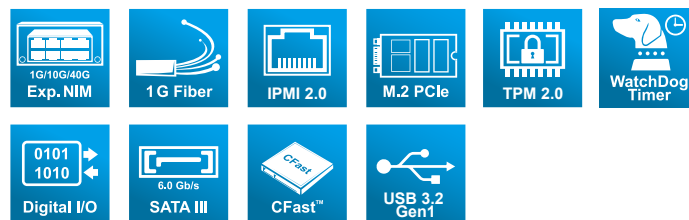

Specification

System

CPU	Intel® Xeon® W-1290E Intel® Xeon® W-1270E Intel® Comet Lake-S Core™ i9-10900E Intel® Comet Lake-S Core™ i7-10700E Intel® Comet Lake-S Core™ i5-10500E Intel® Comet Lake-S Core™ i3-10100E
Chipset	Intel® W480E PCH
Memory	4 x UDIMM DDR4
BIOS	AMI
WatchDog Timer	Software programmable 0~255 sec.

Ethernet

Ethernet port	9 x GbE Copper (RJ-45) 2 x 1G Fiber
LAN Bypass	2-Pair Bypass

Storage

HDD Bay	2 x 2.5"/3.5" SATA-III
M.2	1 x M.2 B key Socket 2242 or 2280

I/O

Console port	1 x Serial Console (RJ-45) 1 x USB Console (Micro-USB)
USB port	2 x USB 3.2 Gen1.(Front-Side)
Expansion	2 x NIM module.(PCIe x 8)(for ANR-W480A1) 2 x NIM module (PCIe x 8, PCIe x 4) (For ANR-W480A2) 1 x PCIe x 8 slot (For ANR-W480A2)
LCD Module	16 characters x 2 lines with 4-key button(optional)
GPIO	8-bit GPIO (4-In, 4-Out), on-board pin header
Exp. NIM	1G/10G/40G, Fiber/Copper/LAN Bypass

Video

Video Interface	VGA(Rear-Side)
-----------------	----------------

Others

Battery	Lithium Battery, 3V 220mAH (CR2032)
Hardware Monitoring	CPU Volt. CPU & SYS Temp. FAN Speeds
Security	TPM 2.0

Power Requirement

Power Unit	1x ATX PSU(300W), 100-240V or optional 1+1 Redundant PSU(300W) 100-240V
------------	--

Software

OS Support	Linux kernel 5.2 and above
------------	----------------------------


Mechanical & Environment

Dimensions	440(W) x 44(H) x 470(D)mm
Operating Temp.	0~ 40°C (32~104°F)
Storage Temp.	-20~80°C (-4~176°F)
Relative Humidity	0 to 90% @40°C, non-condensing
Certifications	CE, FCC Class A, RoHS 2,

Model Name

ANR-W480A1	.1U Rackmount Network Server .Intel® 10th Gen Xeon W, Core™ i9/i7/i5/i3 .2 x Exp. NIM (1G/10G/40G, Fiber/Copper/LAN Bypass) .9 x 1G GbE .2 x 1G Fiber .2 x 2.5" SATA-III .1 x M.2 .1+1 Redundant PSU (300W) or ATX PSU (300W)
ANR-W480A2	.1U Rackmount Network Server .Intel® 10th Gen Xeon W, Core™ i9/i7/i5/i3 .1 x Exp. NIM(1G/10G/40G/Copper/Fiber/LAN Bypass) .1 x Exp. NIM(1G/10G/Copper/Fiber/LAN Bypass) .9 x 1G GbE .2 x 1G Fiber .2 x 2.5" SATA-III .1x PCIe x8 slot .1 x M.2 .1+1 Redundant PSU (300W) or ATX PSU (300W)

I/O Connectors

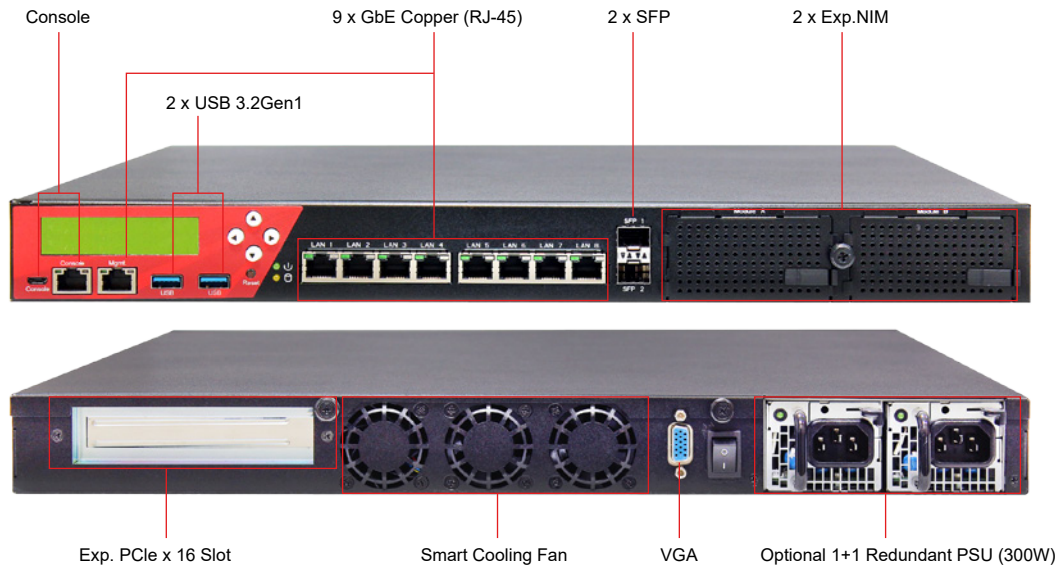

ANR-W480A1/A2

Packing List

- ANR-W480A1/A2 system x 1
- SATA cable x 2
- RJ45 console cable (RJ45 <-> DB9) x 1
- USA / EU / JPN / UK / AS / NZS / SA / India power cord x 1 or 2 (Redundant PSU)
- Rack bracket x 1
- Box packing x 1
- Screw pack x 1

Ordering Information

ANR-W480A1	<ul style="list-style-type: none"> .1U Rackmount Network Server .Intel® 10th Gen Xeon W, Core™ i9/i7/i5/i3 .2 x Exp. NIM (1G/10G/40G, Fiber/Copper/LAN Bypass) .9 x 1G GbE .2 x 1G Fiber .2 x 2.5" SATA-III .1 x M.2 .1+1 Redundant PSU (300W) or ATX PSU (300W)
ANR-W480A2	<ul style="list-style-type: none"> .1U Rackmount Network Server .Intel® 10th Gen Xeon W, Core™ i9/i7/i5/i3 .1 x Exp. NIM(1G/10G/40G/Copper/Fiber/LAN Bypass) .1 x Exp. NIM(1G/10G/Copper/Fiber/LAN Bypass) .9 x 1G GbE .2 x 1G Fiber .2 x 2.5" SATA-III .1x PCIe x8 slot .1 x M.2 .1+1 Redundant PSU (300W) or ATX PSU (300W)