


AES-EL6KA

Intel Elkhart Lake System



Features

- Onboard LPDDR4 Memory 4GB
- Onboard eMMC Storage up to 64GB
- Dual HDMI 2.0 displays up to 4K at 60Hz
- Dual RJ45 GbE Lan
- 2 x USB 3.2 Gen1, 2 x USB 2.0
- 2 x RS232/422/485
- TPM 2.0
- Fan-Less design



Specification

System

CPU	A1: Intel® Celeron® N6210, Dual-Core, 1.5M Cache, 1.2GHz (2.6GHz), 6.5W
	A2: Intel® Celeron® J6412, Quad-Core, 1.5M Cache, 2GHz (2.6GHz), 10W
Chipset	Intel Elkhart Lake SoC
Memory	N6210 On board 4GB J6412 On board 4GB
BIOS	AMI UEFI BIOS

Video

Graphic Controller	Intel® Gen10 UHD Graphics
Video Memory	Shared Memory
Video Interface	2 x HDMI 2.0

Storage

Storage	A1: On board 32GB A2: On board 64GB
---------	--

I/O

Ethernet	2 x GbE LAN (RJ45)
Expansion Slot	1x M.2 2230 E Key 1x Mini-PCI-e
USB	2 x USB 3.2 Gen1 Type A, 2 x USB 2.0 Type A,
GPIO	4 bit GPIO (Reserved)
COM	2 x RS232/422/485
Optional Parts	Power adaptor + Power Code Din Rail Mount Kits Intel Wi-Fi 6E Module Sata & Power cable

Power Requirement

Power Input	12V DC in
-------------	-----------


Software

OS Support	Windows 10 Full,, Windows IOT Kernel 4.8, Ubuntu 22.04
------------	---


Mechanical & Environment

Dimension	140 x 90 x 45mm
Operating Temp.	0~60°C
Safety	RoHS

Dimensions

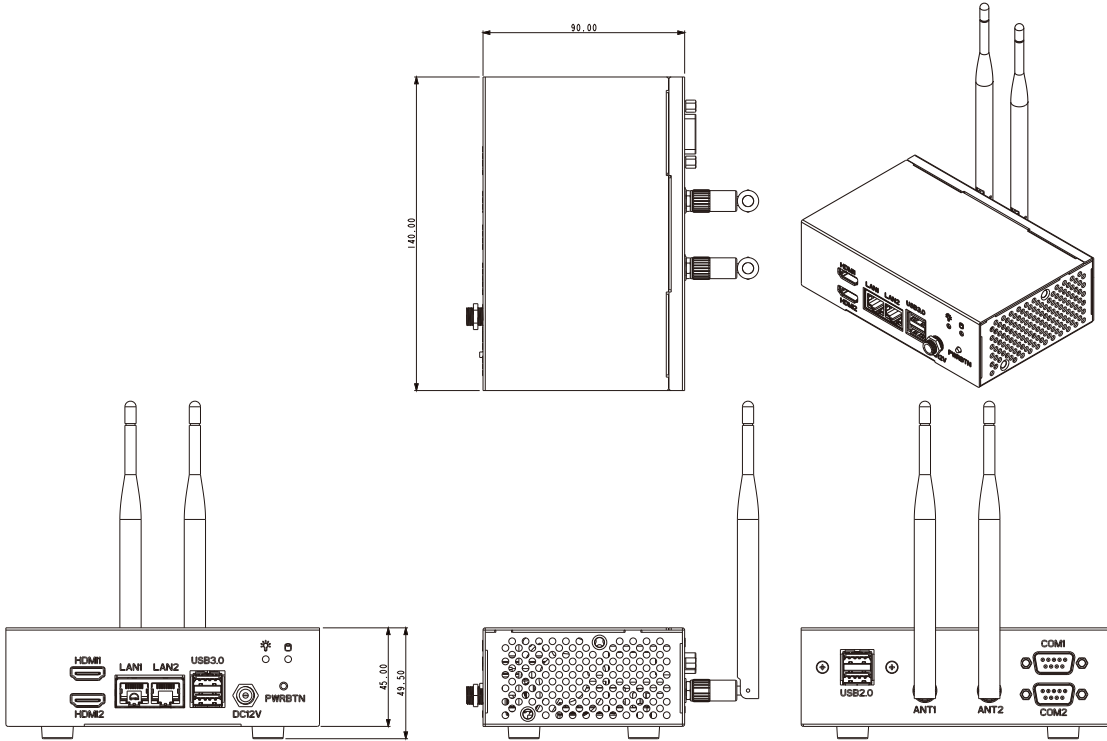

I/O Connectors

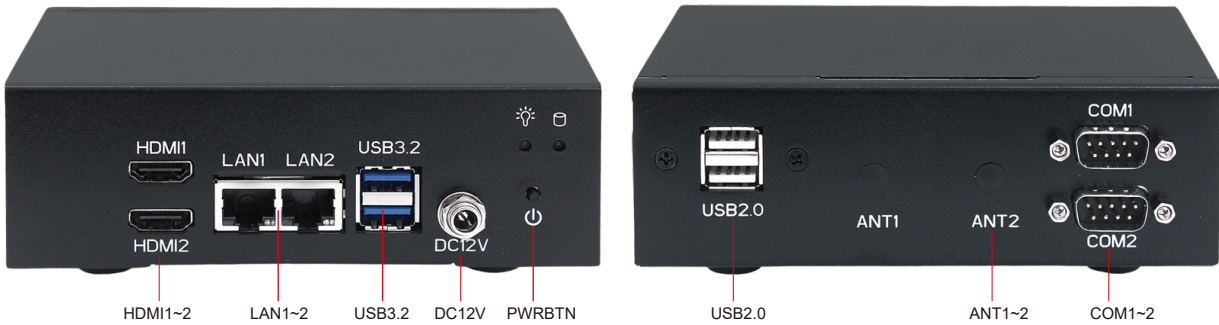

Optional items

- Power Adapter.12V.+ power cord x 1
- DIN-Rail Mount Kit x 1
- Intel Wi-Fi 6E AX210NGW + 2 x Antenna + Cables x 1
- Sata & power cable x 1

Ordering Information

- | | |
|------------|---|
| AES-EL6KA1 | N6210.2HDMI+ Fanless design
4GB LPDDR4 .2LAN.2COM.4USB.32G eMMC.
mSATA.M.2 2230 E. |
| AES-EL6KA2 | J6412.2HDMI+ Fanless design
4GB LPDDR4 .2LAN.2COM.4USB.64GB eMMC.
mSATA.M.2 2230 E. |