



Features

- Powered by NVIDIA® Jetson Orin™ Nano
- Onboard 4/8GB 64/128-bit LPDDR5
- Multiple I/O interface connections for data collection
Gigabit LAN, USB 3.1, Serial Port, CAN-FD
- Wide operating temperature range -20°C to 60°C

Specifications


System	
CPU/GPU	NVIDIA® Jetson Orin™ Nano 6-core Arm® Cortex®-A78AE v8.2 64-bit CPU
Memory	Onboard 4/8GB 64/128-bit LPDDR5
Storage	1 x M.2 M-Key 2280, support NVMe
Real time clock	Yes
Indicators	LED indicator x 1 (Power)
Wireless	1 x M.2 E-Key 2230 1 x M.2 B-Key 3052
Operating System	Linux (NVIDIA Jetpack 5.1.2 and above)
Power Supply	
Power Requirement	9 to 36 VDC
Power Consumption	Max. 25W (with Fan)
MTBF (Hours)	--
Environmental and Mechanical	
Dimension	136mm x 110mm x 57mm
Weight	2.1 kg
Mouting/Installation	Din Rail, Wall Mount, VESA
Operating Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)
Storage Temperature	-40 °F ~ 176 °F (-40 °C ~ 85 °C)
Operating Humidity	10% ~ 95% relative humidity, non-condensing
Certification	
Regulations	CE, FCC, BSMI
Carrier	Planning

Interface	
Serial Port	1 x RS-485 with 5-pin Terminal Block
CAN Bus	1 x CAN-FD with 5-pin Terminal Block
Ethernet	2 x GbE LAN, RJ45
USB	4 x USB 3.1, Type-A
DI/DO	--
AI/AO	--
Display	1 x HDMI 2.0-Out
Power Connector	3-pin Terminal Block
Debug Port	1 x Micro USB for console
Expansion Slot	1 x SIM card slot
Other Interface	--

Radio Frequency		
LTE 4G (CAT 1) (Optional)	3GPP Rel.9 compliant protocol Frequency bands: FDD LTE: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19 /B20 /B25/B26/B28 TDD LTE: B38/B39/B40/B41 WCDMA: B1/B2/B4/B5/B6/B8/B19 GSM: B2/B3/B5/B8	SIM card size: nano-SIM slot Antenna type: External type Antenna connector: SMA-Male
GPS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo	

Dimension

Unit: mm / in

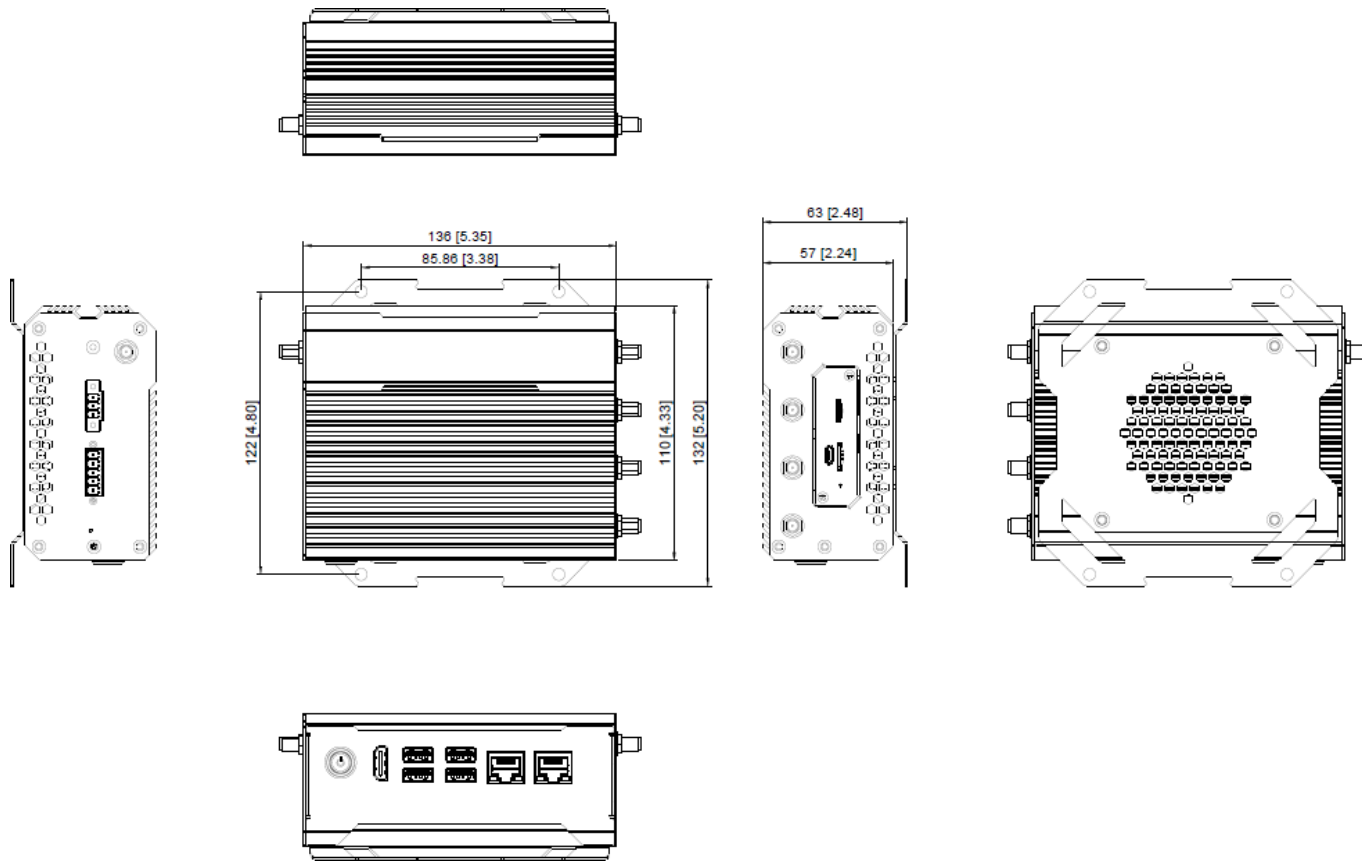

Ordering Information

Part Number	Packing List
AES-ORNOE1 NVIDIA® Jetson Orin™ Nano, 4GB, 9 to 36VDC	AES-ORNOE x1 3-pin Terminal block Connector x1 5-pin Terminal block Connector x1 Wall Mount x1
AES-ORNOE2 NVIDIA® Jetson Orin™ Nano, 8GB, 9 to 36VDC	
AES-ORNOE3 NVIDIA® Jetson Orin™ Nano, 4GB, 128GB NVMe, 9 to 36VDC	
AES-ORNOE4 NVIDIA® Jetson Orin™ Nano, 8GB, 128GB NVMe, 9 to 36VDC	

Optional Accessories

Part Number / Item	
4B01XUD12060AS3	Adapter (In:100-240V / Out: DC12V 5A 60W)
4K02X00000030AR	Power Cord EU
4K02X00000020AR	Power Cord US